

PALCO 2 SUBIDAS

Two storage platform rises.

Constructed of extruded aluminum with a broad platform of work, footer and balustrade 1 m high protection. The rising ramp is wide and convenient, has an inclination of 55° with skid-resistant steps of 20 cm and a depth distance of 23 cm steps. To avoid excessive transport costs the ladder is sent dismantled, following along a book of assembly instructions. The side is almost perpendicular to the ground to allow the user access to a close wall or machine. The brake system is automatic and it is activated when the ladder is in use position, which means, with the person on the ladder and off as the user exits from the top of the stairs. The ladder can be easily transported to the workplace thanks to the wheels.



TECHNICAL


- Number of steps: 3-8;
- Distance between steps: 23 cm;
- Depth steps: 20 cm;
- Profile amount: 65x25 mm;
- Width rise: 60 cm;
- Climb the slope grade: 55°;
- Dimensions platform: 60x80 cm;
- Height rail: 100 cm;
- Footer height: 6 cm;
- Platform height: from 0,66 to 1,86 m;
- Overall height of the ladder: from 1,57 to 2,77 m;
- Capacity: 150 kg.

EQUIPMENT

- Handrails;
- Footer;
- 2 wheels with brake;
- 2 self blocking wheels of 125 mm in diameter;
- Use and maintenance manual;
- Identification label.

OPTIONS

- 2nd side railing rise;
- Ladder without wheels;
- Tool holder tray;
- Closing door.

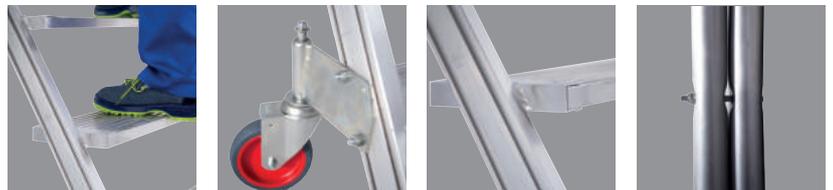

REF						KG	€
		m	m	m	cm		
10317	3	0.66	1.57	2.66	77x151	40.00	
10318	4	0.90	1.81	2.90	82x179	43.00	
10319	5	1.14	2.05	3.14	88x207	47.00	
10320	6	1.38	2.29	3.38	94x235	52.00	
10321	7	1.62	2.53	3.62	100x262	58.00	
10322	8	1.86	2.77	3.86	106x299	65.00	



Decree
50/2005
Law

Certificate
EN 131-7
Standards

5 years
WARRANTY

professional use

150
KG